






-  60mm CHARACTER SIZE
-  8 TO 32 CHARACTERS
-  UP TO 27m READABILITY
-  SIMPLE PROTOCOL
-  ROBUST IP 54 HOUSING



**Product description.**

LDA displays in type A robust housings are designed for displaying messages in wide range of industrial and public information applications. High efficient LED components provide good visibility in all conditions. They are available in 8 to 32 characters length.

LDA can receive data from various sources in simple ASCII format using one of three available serial interfaces. Displayed messages can be formatted or scrolled if needed. LDAASCII protocol is very flexible and can be configured to almost all serial communication applications.


The display and communication format can be easily programmed using push-buttons and on-screen menu. LDA housings are made of robust extruded aluminum with sealed plastic end-covers. The cables are introduced inside through two PG-7 cable glands. Displays can be wall-mounted with adjustable brackets or directly using nuts on the rear wall.

**Technical data**

character height	60mm
character format	5x8 LED matrix
display length	8/16/24/32 characters
LED colour	high efficient red
brightness	20-50mcd / pixel
interface	RS232, RS485, TTY
protocols	ASCII, MODBUS RTU
supply voltage	24VDC +/-10%
protection degree	IP 54

**DIMENSIONS**

LDA-x/60-...-A	400-1480 x106 x 50mm
----------------	----------------------

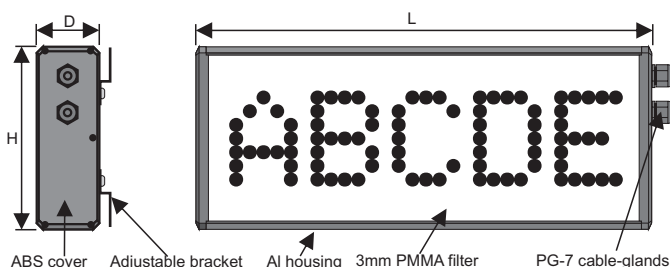

**LDA-...-A marking exmple:**

